

Test Equipment Solutions Datasheet

Test Equipment Solutions Ltd specialise in the second user sale, rental and distribution of quality test & measurement (T&M) equipment. We stock all major equipment types such as spectrum analyzers, signal generators, oscilloscopes, power meters, logic analysers etc from all the major suppliers such as Agilent, Tektronix, Anritsu and Rohde & Schwarz.

We are focused at the professional end of the marketplace, primarily working with customers for whom high performance, quality and service are key, whilst realising the cost savings that second user equipment offers. As such, we fully test & refurbish equipment in our in-house, traceable Lab. Items are supplied with manuals, accessories and typically a full no-quibble 2 year warranty. Our staff have extensive backgrounds in T&M, totalling over 150 years of combined experience, which enables us to deliver industry-leading service and support. We endeavour to be customer focused in every way right down to the detail, such as offering free delivery on sales, covering the cost of warranty returns BOTH ways (plus supplying a loan unit, if available) and supplying a free business tool with every order.

As well as the headline benefit of cost saving, second user offers shorter lead times, higher reliability and multivendor solutions. Rental, of course, is ideal for shorter term needs and offers fast delivery, flexibility, try-before-you-buy, zero capital expenditure, lower risk and off balance sheet accounting. Both second user and rental improve the key business measure of Return On Capital Employed.

We are based near Heathrow Airport in the UK from where we supply test equipment worldwide. Our facility incorporates Sales, Support, Admin, Logistics and our own in-house Lab.

All products supplied by Test Equipment Solutions include:

- No-quibble parts & labour warranty (we provide transport for UK mainland addresses).
- Free loan equipment during warranty repair, if available.
- Full electrical, mechanical and safety refurbishment in our in-house Lab.
- Certificate of Conformance (calibration available on request).
- Manuals and accessories required for normal operation.
- Free insured delivery to your UK mainland address (sales).
- Support from our team of seasoned Test & Measurement engineers.
- ISO9001 quality assurance.

Test equipment Solutions Ltd
Unit 8 Elder Way
Waterside Drive
Langley
Berkshire
SL3 6EP

T: +44 (0)1753 596000
F: +44 (0)1753 596001

Email: info@TestEquipmentHQ.com
Web: www.TestEquipmentHQ.com



Agilent 83751A/B and 83752A/B Synthesized Sweepers

2 to 20 GHz, 10 MHz to 20 GHz

Data Sheet



Agilent Technologies



Specifications

Specifications describe warranted instrument performance over the 0 to 55 °C temperature range unless otherwise noted. Specifications apply after the peak function has been performed. Supplemental characteristics (indicated by italics) are intended to provide information useful in applying the instrument, but are not warranted parameters.

Frequency

Range

83751A/B: 2 GHz to 20 GHz

83752A/B: 10 MHz to 20 GHz

Timebase stability

Standard 10 MHz time base: ± 10 ppm

High stability time base (Option IE5):

accuracy = calibration $\pm$ aging rate

$\pm$ temperature effects $\pm$ line voltage effects

Aging rate: 5×10^{-10} /day, 1×10^{-7} /year

With temperature: 1×10^{-10} /°C

With line voltage: 5×10^{-10} for 10% change

CW mode

Resolution: 1 Hz

Accuracy: same as time base

Switching time: 70 ms max

Stepped sweep mode

Resolution: settable 1 Hz, display 1 kHz

Accuracy: same as timebase

Minimum step size: same as resolution

Number of points: 2 to 1601

Switching time/point¹: 7 ms + 8 ms/GHz step

Dwell time/point: 1 ms to 1 s


Ramp (analog, phase locked) sweep mode

Resolution: 1 kHz

Accuracy (25 $\pm$ 5 °C):

For 100 ms sweeps the greater of: $\pm 0.01\%$ of span $\pm$ time base or ± 75 kHz $\pm$ time base

At other sweep speeds: [$\pm 0.001\%$ of span]/[sweep time (s)] $\pm$ time base

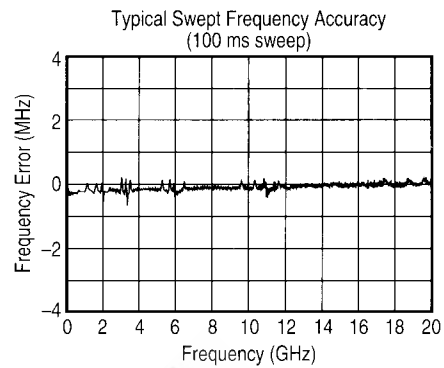

Sweep time: 10 ms to 100 s; 400 MHz/ms max

Markers

10 independent continuously variable markers

Display modes: z-axis intensity
or RF amplitude pulse

Sweep functions

Start/stop, center frequency/span, marker, ramp, stepped, manual, alternate and power sweep

Marker sweep: sweeps between markers one and two

Alternate sweep: alternates successive sweeps between current front panel setting and stored setup

RF output²

Maximum leveled power³ (25 $\pm$ 5 °C)


83751A, 83752A: +10 dBm

83751B, 83752B:

<2 GHz +16 dBm

>2 GHz +17 dBm

With option 1E1 (step attenuator): reduce by 1 dB

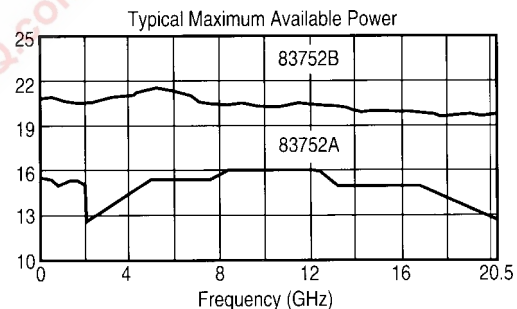

Minimum settable power

83751A, 83752A: -15 dBm

With option 1E1: -85 dBm

83751B, 83752B: -10 dBm

With option 1E1: -80 dBm

¹ Up to 50 ms switching times can occur when crossing the 2 GHz band switch point.

² With type N connector (option 1ED), performance is typical above 18 GHz

³ Power typically degrades <2.5 db over 0 to 55 °C

Resolution

Settable: 0.01 dB

Display: 0.1 dB

Accuracy and flatness⁴

Power level	Accuracy (25 ±5 °C)	Flatness ⁵
83751A, 83752A		
>-10 dBm	±1.0 dB	±0.7 dB
>-80 dBm	±1.5 dB	±1.2 dB
83751B, 83752		
>-75 dBm	±1.5 dB	±1.3 dB

Power sweep

±25 dB/sweep

Usable from minimum to maximum leveled power, within any one attenuator setting

Power slope

0 to ±2 dB/GHz, up to power sweep limit

External leveling

External detector:

Range: -0.2 mV to -0.5 V

Bandwidth (sweep speed and modulation mode dependent): 10 or 100 kHz, nominal

External power meter: 1 Hz bandwidth, nominal

External mm-wave module: 83550 series compatible with option 1EE

User flatness (level) correction

Number of points: 2 to 801 points/table

Number of tables: up to 9

Entry modes⁶: power meter, GPIB

Source match < 1.7:1 SWR, (internally leveled)

Spectral purity

Harmonics (at max leveled power)

83751A, 83752A:

10 MHz to 1.5 GHz: -30 dBc

1.5 to 20 GHz: -45 dBc

83751B, 83752B: -20 dBc


Subharmonics

None

Non-harmonic spurious^{4,7}

-50 dBc

Single-sideband phase noise

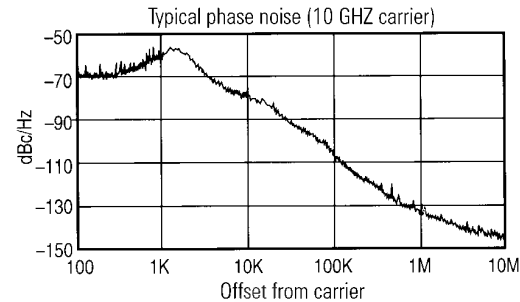

Residual FM (0.05 to 15 kHz bandwidth)⁸

1 kHz RMS in CW mode

Modulation

Pulse

On/off ratio: 60 dB

Rise/fall times:

0.5 to 2 GHz: 15 ns

2 to 20 GHz: 100 ns rise, 50 ns fall

Minimum leveled width⁹: 2 μs

Internal pulse generator:

Width range: 1 μs to 65 μs

Period range: 2 μs to 65 μs

Resolution: 1 μs

Internal square wave:

1.0 kHz and 27.8 kHz (scalar mode)

AM

Sensitivity: 1 dB/V

Bandwidth (3 dB): >100 kHz, usable to 1 MHz

Depth for 8375XA: 20 dB; (+10 dBm to -10 dBm)

Depth for 8375XB: 22 dB; (+17 dBm to -5 dBm)

Input impedance: 3.5 kohms

FM

AC/Locked mode:

Rates: 50 kHz to 10 MHz

Maximum deviation: same as unlocked mode up to 25 x rate

DC/Unlocked mode:

Rates: DC to 10 MHz

Maximum deviation:

DC to 100 Hz rates: ± 75 MHz

100 Hz to 1 MHz rates: ±7 MHz

1 MHz to 2 MHz rates: ±5 MHz

2 MHz to 10 MHz rates: ±1 MHz

Sensitivity: -6 or -20 MHz/V

Input impedance: 1 kohm

⁴ Specifications apply for coupled attenuator mode and ALC level >-10 dBm (83751A/83752A), >-5 dBm (83751B/83752B)

⁵ Below 50 MHz, flatness is specified over 25 ±5 °C range

⁶ Compatible with Agilent 437B, 438A, and 70100 power meters

⁷ Specifications apply for frequencies >500 kHz from carrier, and at levels <+5 dBm below 2 GHz

⁸ Residual FM is typically <10 kHz in unlocked FM mode

⁹ For frequencies >500 MHz in CW mode, or >2 GHz in swept mode

General

Compatibility

83751/83752 sweepers are compatible with 8757A/C/D/E scalar analyzers, and 8970B noise figure meters.

Programming

83751/83752 sweepers are fully compatible with the Standard Commands for Programmable Instruments (SCPI) language. SCPI complies with IEEE 488.2-1987. Agilent 8350 mnemonics have also been implemented to provide compatibility with ATE systems that include an 8350B sweeper.

Two-tone (master/slave) measurements

Two 83751/83752 sweepers can synchronously track each other over swept or stepped frequencies at any fixed or swept frequency offset. To implement, the 10 MHz reference oscillators and sweep interface connectors need to be attached.

Environmental

Operating temperature range: 0 to 55 °C

EMC: Conducted and radiated interference comply with: EN55011 class A/CISPR-11 Class A
EN50082-1-1991

IEC 801-2/1991	4 kV CD, 8 kV AD
IEC 801-3/1984	3 V/m (26-500 MHz)
IEC 801-4/1988	500 V

Warm-up time

Operation: Requires 30 minutes warm-up time from cold start at 0 to 55 °C. Internal temperature equilibrium reached after 2 hour warm-up at stable ambient temperatures.

Frequency reference (option 1E5 only): Reference time base is kept at operating temperature with the instrument connected to AC power. Instruments disconnected from AC power for more than 24 hours require 30 days to achieve time base aging specification. Instruments disconnected from AC power less than 24 hours require 24 hours to achieve time base aging specification.

Power requirements

90-132 VAC (50-60 or 400 Hz), or 198-264 VAC (50-60 Hz); 400 VA maximum. Optimum voltage range automatically selected.

Dimensions

133H x 425W x 483D mm (5.25 x 16.75 x 19 inches); excluding front and rear panel protrusions

Weight

Net: 16 kg (35 lb)

Shipping: 23 kg (49 lb)

Inputs and outputs

RF output

Nominal output impedance 50 ohms. (Precision 3.5 mm male connector on front panel; optional type N or rear panel connectors are available).

External ALC input

Used for external leveling with negative detector or power meter. Nominal input impedance 100 kohms, damage level ± 15 volts. (BNC female, front panel)

Sweep output

Supplies a voltage proportional to the sweep ranging from 0 volts at start of sweep to +10 volts at end of sweep, regardless of sweep width. Nominal output impedance 100 ohms. Typical accuracy: $\pm 0.05\%$, ± 5 mV into high impedance load. When used with 8757D scalar analyzer in ramp-sweep mode, the rear-panel output is a 0 to 10 volt pulse similar to trigger output. (BNC female, front and rear panel)

Trigger output

Outputs a 1 μ s wide negative-going TTL pulse at 1601 points evenly spaced across an analog sweep, or at each point in step sweep mode. When used with 8757D scalar analyzers, the number of pulses per sweep (in analog sweep mode) is determined by the number of 8757 trace points. (BNC female, rear panel)

Trigger input

Activated on TTL rising edge. Used to externally initiate an analog sweep or to advance to the next point in step sweep mode. Damage level +10, -4 volts. (BNC female, rear panel)

Pulse input/output

TTL low turns RF off. When using internal pulse generator, the modulating signal is available at this connector. Nominal input 1 kohm pull-up to +5 volts. Damage level +10, -5 volts. (BNC female, rear panel)

AM input

Nominal input impedance 3.5 kohms. See modulation specifications. Damage level ± 15 volts. (BNC female, rear panel)

FM input

Nominal input impedance 1 kohm. See modulation specifications. Damage level ± 15 volts. (BNC female, rear panel)

10 MHz reference output

Nominal signal level 0 dBm, and output impedance 50 ohms. Accuracy determined by time base used. (BNC female, rear panel)

10 MHz reference input

Accepts a -5 to 10 dBm signal from an external time base reference which is within ± 10 ppm of 10 MHz or any sub-multiple down to 1 MHz. Nominal input impedance 50 ohms. (BNC female, rear panel)

Stop-sweep in/out

Sweep will stop when grounded externally. TTL high while sweeping, TTL low when source stops sweeping. Damage level +10, -4 volts. (BNC female, rear panel)

Z-axis blanking

Supplies positive rectangular pulse (approximately +5 volts into 2 kohms) during the retrace and band switch points of the RF output. Also supplies a negative pulse (-5 volts) when the RF is at a marker frequency (BNC female, rear panel).

Volts/GHz output

Supplies a voltage proportional to output frequency, which can be configured to any desired sensitivity and offset within ± 12 volts. Default setting is 0.5 volts/GHz. Minimum load impedance 2 kohms. Typical accuracy $\pm 0.1\% \pm 10$ mV. (BNC female, rear panel)

Source module interface

Provides bias, flatness correction, and leveling connections to the 83550 series mm-wave source modules. (Option 1EE; rear panel connector)

Auxiliary interface

Provides special control signals. (25-pin D subminiature receptacle, rear panel)

Interface bus (GPIB)

GPIB operates in accordance to IEEE-488.1-1987 and IEEE-488.2-1987 interface standards. Rear panel switch allows setting of the default GPIB address and programming language, which can be modified from the front panel.

Ordering Information

Models	Frequency range
83751A	2 to 20 GHz
83751B	2 to 20 GHz (high power)
83752A	10 MHz to 20 GHz
83752B	10 MHz to 20 GHz (high power)

To add options to a model, use the following ordering scheme:

Example

Model #	83752B
Model #-option #	83752B-1E1
Model #-option #	83752B-1E4

Options

Model #-1E1	Step attenuator
Model #-1E4	Rear panel RF output
Model #-1E5	High stability time base
Model #-1EE	mm-wave module source interface

Inputs/Outputs

Model #-1ED	Type-N RF output connector
Model #-1EF	3.5mm RF output connector

Documentation

Model #-UK6 with test data	Commercial calibration certificate
Model #-0B1	Manual set
Model #-AB0	Chinese localization - Taiwan
Model #-AB1	Korean localization
Model #-AB2	Chinese localization - China
Model #-ABD	German localization
Model #-ABF	French localization
Model #-ABJ	Japanese localization
Model #-0B0	Delete manuals

Accessories

Model #-1CH	Front handle kit
Model #-1CM	Rack mount flange kit
Model #-1CP	Rack mount flange kit with handles
Model #-1CR	Rack slide kit

Warranty and Service

Standard warranty is 12 months.

For warranty and service of 5 years, specify 60 months (quantity = 60)

R51B ice plan (months)	Return to Agilent warranty and service plan (months)
---------------------------	--

Calibration

For 3 years, specify 36 months of the appropriate calibration plan.

For 5 years, specify 60 months.

R-50C-001	Standard calibration plan (months)
R-50C-002 (months)	Standards compliant calibration plan

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test and measurement needs.

Online assistance:

www.agilent.com/find/assist

Phone or Fax

United States:
(tel) 1 800 452 4844

Canada:
(tel) 1 877 894 4414
(fax) (905) 282 6495

China:
(tel) 800 810 0189
(fax) 1 0800 650 0121

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Taiwan:
(tel) 080 004 7866
(fax) (886 2) 2545 6723

Other Asia Pacific Countries:
(tel) (65) 375 8100
(fax) (65) 836 0252
Email: tm_asia@agilent.com

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2002
Printed in USA, March 20, 2002

5091-5908E



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Technologies